



FIRST CLASS *p u m p* for FINE **WINES** and **SPIRITS**

With Wilden's

Saniflo™

Air Operated Pumps

Preserve True Quality, Flavor and Aroma

- Seal-less design minimizes air incorporation and oxidation
- Low shear lets entrained air escape
- Gentle handling reduces release of seed tannins in must
- Runs on lubricant free compressed air
- 3A and FDA hygienic and designed for safe product changes

Meet Process Needs with Flexibility

- Run dry and deadhead pump with no damage
- 3 to 1 high pressure models for filter applications
- Portable and light weight, 50% of other pumps
- Variable flow and metering for blending
- No electrical hazards
- Self priming
- Stall, freeze and lube free
- Smooth flow capable with pulsation dampeners

Cost Effectiveness

- Low acquisition and maintenance costs
- High reliability, stall and freeze free design
- Few tools needed for complete servicing

General Specifications

- actual specifications vary by model

Sizes: 13 mm (1/2") to 76 mm (3")

Pressure rates: Up to 8.6 bar (125 psig)

3:1 high pressure: Up to 17 bar (250 psig)


Flow rates: Up to 884 lpm (223 gpm)

Materials: 304/316 stainless steel for
product contact parts

Elastomers: Food grade selection

Power: Compressed air

1 9 5 5
WILDEN
50TH
A n n i v e r s a r y
2 0 0 5

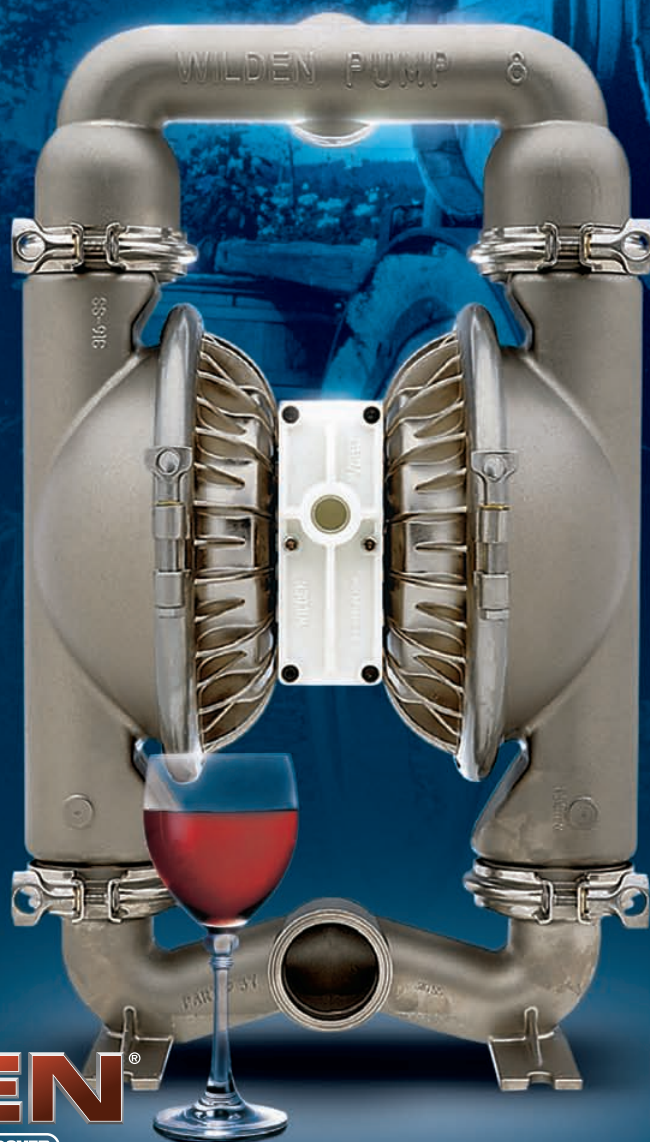

WILDEN®

A DOVER COMPANY



High Flow & Pressure 3:1 Lees Filter Press Charging



Barrel Topping or Pump Out for Blending



Pump Over Process



Must handling and other multi-use applications

Also: Barrel Wash Lees Recovery, Filling, Chemical Dosing, Effluent and Sump Applications



22069 Van Buren Street, Grand Terrace, CA 92313-5607
Telephone 909-422-1730 • Fax 909-783-3440
wilden@wildenpump.com

Your Authorized Distributor:

Printed in the U.S.A.
WIL_12090_F_01

Copyright 2004 Wilden Pump & Engineering, LLC

S-69 San 9/04
Replaces 1/04

Wil-Flex™, Saniflex™, Tetra-Flex™, FCSII™, Wil-Gard™, Saniflo™, Turbo-Flo™, Ultra-Pure™, Accu-Flo™, Accu-Pulse™, and Air-Tech™ are trademarks of Wilden Pump and Engineering, LLC
Wilden®, Equalizer®, Ultra-Flex® and Pro-Flo® are registered trademarks of Wilden Pump and Engineering, LLC • Nordel®, Viton®, Hytrel® and Teflon® are registered trademarks of DuPont Dow Elastomers.
Tri-Clover® is a registered trademark of Tri-Clover, Inc. • 3-A® is a registered trademark of Sanitary Standards, Inc. • Gylon® is a registered trademark of Garlock Sealing Technologies.